


NPN Transistors

BCX19

■ Features

- Collector Current Capability $I_c=0.5A$
- Collector Emitter Voltage $V_{CE0}=45V$
- Low voltage

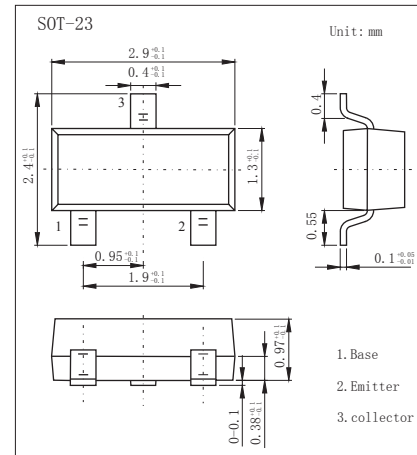

■ Absolute Maximum Ratings $T_a = 25^\circ C$

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V_{CB0}	50	V
Collector - Emitter Voltage	V_{CE0}	45	
Emitter - Base Voltage	V_{EB0}	5	
Collector Current - Continuous	I_c	500	mA
Collector Power Dissipation	P_c	225	mW
Junction Temperature	T_J	150	$^\circ C$
Storage Temperature Range	T_{stg}	-55 to 150	

■ Electrical Characteristics $T_a = 25^\circ C$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V_{CB0}	$I_c = 100 \mu A, I_E = 0$	50			V
Collector- emitter breakdown voltage	V_{CE0}	$I_c = 1 mA, I_B = 0$	45			
Emitter - base breakdown voltage	V_{EB0}	$I_E = 100 \mu A, I_c = 0$	5			
Collector-base cut-off current	I_{CB0}	$V_{CB} = 50 V, I_E = 0$			0.1	μA
Emitter cut-off current	I_{EB0}	$V_{EB} = 5V, I_c = 0$			0.1	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_c = 500 mA, I_B = 50 mA$			0.62	V
Base - emitter saturation voltage	$V_{BE(sat)}$	$I_c = 500 mA, I_B = 50 mA$			1.2	
Base-emitter voltage	$V_{BE(on)}$	$V_{CE} = 1V, I_c = 500 mA$			1.2	
DC current gain	$h_{FE(1)}$	$V_{CE} = 1V, I_c = 100 mA$	100		600	
	$h_{FE(2)}$	$V_{CE} = 1V, I_c = 300 mA$	70			
	$h_{FE(3)}$	$V_{CE} = 1V, I_c = 500 mA$	40			
Collector capacitance	C_c	$V_{CB} = 10V, I_E = I_c = 0, f = 1 MHz$		5		pF
Transition frequency	f_T	$V_{CE} = 5V, I_c = 10 mA, f = 100 MHz$	100			MHz

■ Marking

Marking	U1
---------	----



炬芯微
XUANXINWEI

SMD Type

Transistors

NPN Transistors

BCX19

Typical Characteristics

