


DO-214AC/SMA

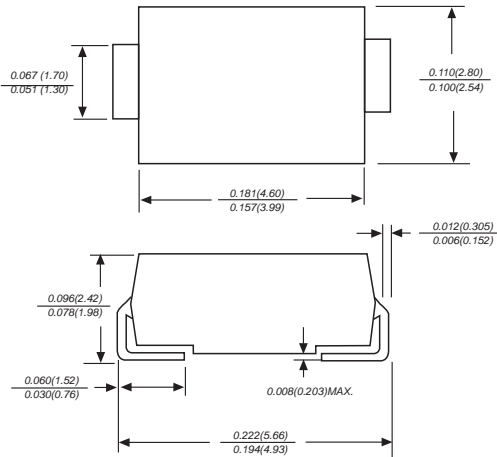

Dimensions in inches and (millimeters)

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-214AC molded plastic body
Terminals: leads solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.070 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS


Ratings at 25°C ambient temperature unless otherwise specified.
 Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Catalog Number	SYMBOLS	SS22	SS23	SS24	SS25	SS26	SS28	SS210	UNITS	
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	80	100	VOLTS	
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	56	70	VOLTS	
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	80	100	VOLTS	
Maximum average forward rectified current at T_L (see fig. 1)	$I_{(AV)}$	2.0							Amps	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50.0							Amps	
Maximum instantaneous forward voltage at 2.0A	V_F	0.55		0.70		0.85		Volts		
Maximum DC reverse current at rated DC blocking voltage	I_R	0.5		10.0		5.0		mA		
Typical junction capacitance (NOTE 1)	C_J	220		180		pF				
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$	75.0							°C/W	
Operating junction temperature range	T_J	-65 to +125					-65 to +150			°C
Storage temperature range	T_{STG}	-65 to +150							°C	


Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
 2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

RATINGS AND CHARACTERISTIC CURVES SS22 THRU SS210


AVERAGE FORWARD RECTIFIED CURRENT,
AMPERES

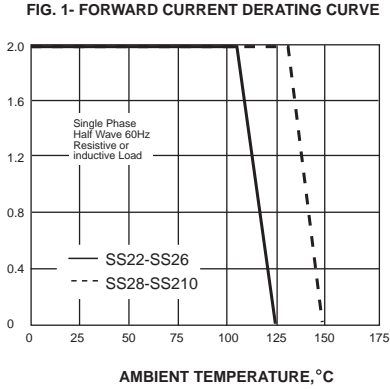


PEAK FORWARD SURGE CURRENT,
AMPERES

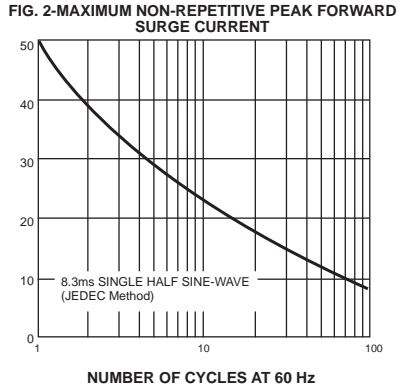


INSTANTANEOUS FORWARD
CURRENT, AMPERES

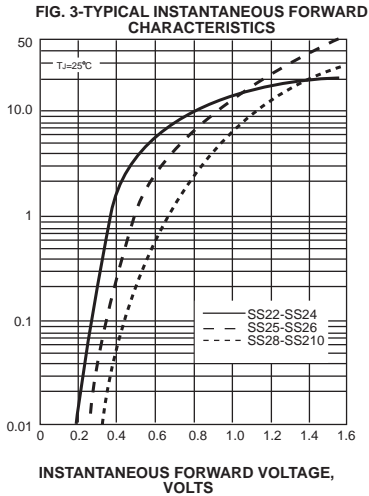

INSTANTANEOUS REVERSE CURRENT,
MILLIAMPERES

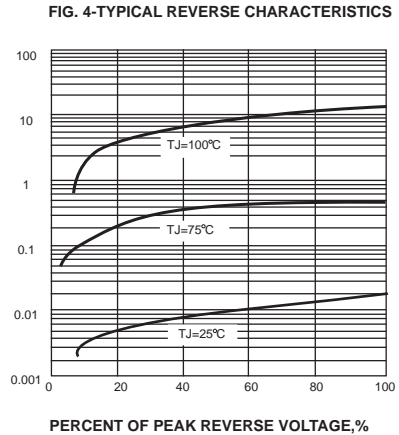

JUNCTION CAPACITANCE, pF

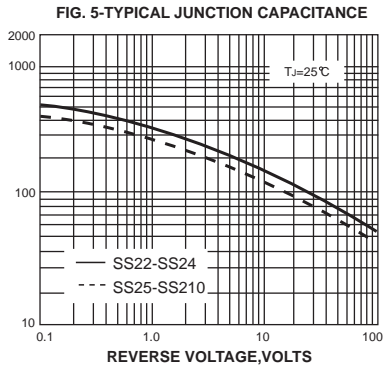

TRANSIENT THERMAL IMPEDANCE,
°C/W

